

APM32F030x8

Errata Sheet

Version: V2.1

Contents


1 Introduction	2
2 Product Version and Silk Screen Printing Instructions	3
3 Errata List.....	4
4 Clock	5
4.1 HSE serves as the clock source.....	5
4.2 PLL frequency multiplication.....	5
5 GPIO	7
5.1 BOOT pin	7
5.2 Pin level delay.....	7
6 Tool.....	8
6.1 Burning.....	8
7 Revision History	9

1 Introduction

This Manual mainly introduces the limitations of the APM32F030x8 series products during use. If you encounter the application scenarios described in the manual during the use of the product, please use the product according to the solutions provided in the manual; if no solution is provided, please avoid this application scenario.

2 Product Version and Silk Screen Printing Instructions

Figure 1 Product Version and Silk Screen Printing Instructions

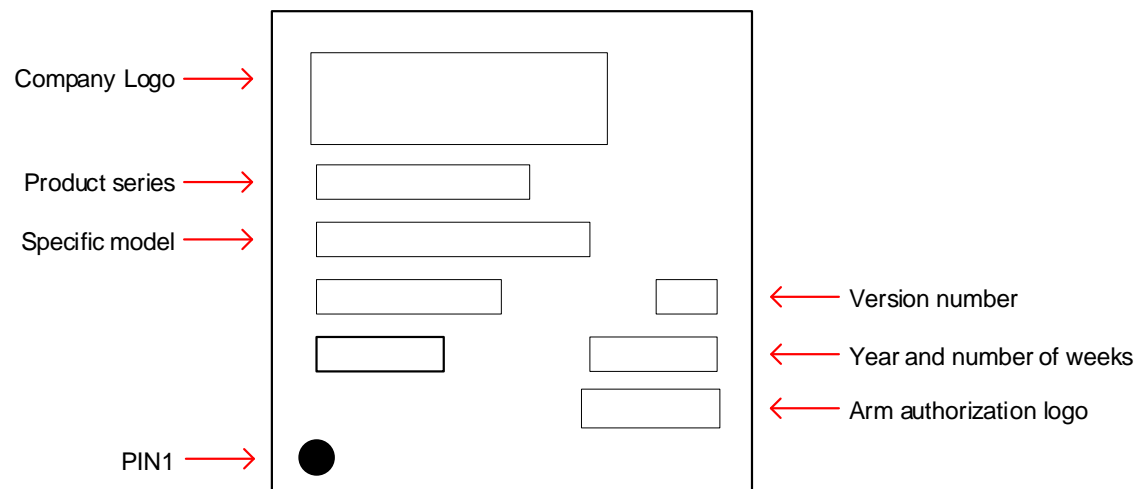

3 Errata List

Table 1 Errata List

Category	Introduction	Product version
		B
Clock	HSE serves as the clock source	•
GPIO	BOOT pin	•
	Pin level delay	•
Tool	Burning	•

Note: "•" indicates that this errata description is involved in this version; the 'X' indicates that it is not involved in this version.

4 Clock

4.1 HSE serves as the clock source

Problem description


When the timeout value of the software that sets the HSE startup time is too small (e.g. 0x0500), external clock startup ready timeout may occur, which may result in the failure of using HSE as the clock source.

Solutions

To ensure normal startup of the crystal oscillator, it is recommended to modify the external clock wait time timeout value to at least 0x5000.

The macro definition of HSE_STARTUP_TIMEOUT can be modified. The macro definition is in XXX32F0xx.h. The recommended crystal oscillator circuit is shown below (the capacitance value should match the crystal oscillator model):

Figure 2 Crystal Oscillator Circuit

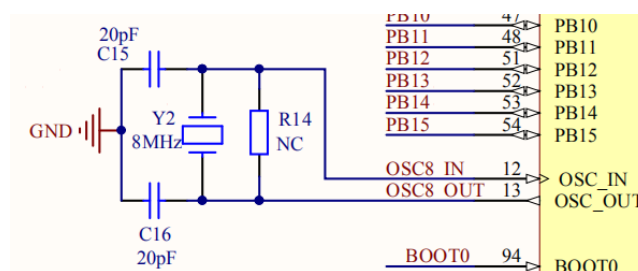

Source program:

```
/*Enable HSE*/
RCC->CR |= ((uint32_t)RCC_CR_HSEON);
/*Wait till HSE is ready and if Timeout is reached exit*/
do
{
    HSEStatus = RCC->CR & RCC_CR_HSERDY;
    StartUpCounter++;
} while((HSEStatus == 0) && (StartUpCounter != HSE_STARTUP_TIMEOUT));
)
```

4.2 PLL frequency multiplication

Problem description

After doubling to 24MHz using PLL, the frequency output through the PA8 pin is unstable.

Solutions

When using PLL multiplication, first use a large multiplication coefficient to increase the frequency of the VCO, and then output at a lower frequency. For example, increase the PLL

frequency to 48MHz and then divide its frequency to 24MHz through an AHB prescaler.

5 GPIO

5.1 BOOT pin

Problem description

Boot0 pin is suspending, and fails to start the program from Flash.

Solutions

It is recommended not to suspend the pins, but to set the pins to high or low level.

5.2 Pin level delay

Problem description

When Switching the I/O pin mode directly from "push-pull output high level" to "input mode", there is a level delay phenomenon. For example, at 55°C and 3.3.V, there is a level delay phenomenon when switching from push-pull input high level to pull-down input.

Solutions

Choose either of the following solutions:

- After the push-pull output high-level is completed, insert the push-pull low-level output or configure as open-drain pull-up output mode, and then switch to input mode.
- Increase the duration of the input/output pull-down input mode (e.g. 3s).

6 Tool

6.1 Burning

Problem description

When the xxT packet is used on Keil 5.27 or 5.28 version, it cannot be burnt through AP-LINK, ULINK2 and ST-LINK.

Solutions

Choose either of the following solutions:

- Use APEXMIC.APM32F0xx_DPF or keil.xTM32F1xx.DFP.2.2.0.pack.
- Modify keil.xTM32F0xx.DFP.pdsc, and the specific operation is as follows:
 - (1) Look for keil.xTM32F1xx.DFP.pdsc under the installation directory of keil;
 - (2) Select the file, and right-click to choose the attributes;
 - (3) Remove the read-only attribute of the file;
 - (4) Open keil.xTM32F0xx.DFP.2.2.0.pack, and look for the location of Not a genuine xT Device! Abort connection;
 - (5) Try to find the following content:

```
<!--
Query(0,"Not a genuine xT Device! Abort connection",1);
Message(2,"Not a genuine xT Device! Abort connection.");
-->
```
 - (6) Log out.

7 Revision History

Table2 Document Revision History

Date	Version	Revision History
August 2024	2.0	New
August 2025	2.1	(1) Add Chapter 4.2

Statement

This document is formulated and published by Geehy Semiconductor Co., Ltd. (hereinafter referred to as "Geehy"). The contents in this document are protected by laws and regulations of trademark, copyright and software copyright. Geehy reserves the right to make corrections and modifications to this document at any time. Read this document carefully before using Geehy products. Once you use the Geehy product, it means that you (hereinafter referred to as the "users") have known and accepted all the contents of this document. Users shall use the Geehy product in accordance with relevant laws and regulations and the requirements of this document.

1. Ownership

This document can only be used in connection with the corresponding chip products or software products provided by Geehy. Without the prior permission of Geehy, no unit or individual may copy, transcribe, modify, edit or disseminate all or part of the contents of this document for any reason or in any form.

The “极海” or “Geehy” words or graphics with “®” or “TM” in this document are trademarks of Geehy. Other product or service names displayed on Geehy products are the property of their respective owners.

2. No Intellectual Property License

Geehy owns all rights, ownership and intellectual property rights involved in this document.

Geehy shall not be deemed to grant the license or right of any intellectual property to users explicitly or implicitly due to the sale or distribution of Geehy products or this document.

If any third party's products, services or intellectual property are involved in this document, it shall not be deemed that Geehy authorizes users to use the aforesaid third party's products, services or intellectual property. Any information regarding the application of the product, Geehy hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party, unless otherwise agreed in sales order or sales contract.

3. Version Update

Users can obtain the latest document of the corresponding models when ordering Geehy products.

If the contents in this document are inconsistent with Geehy products, the agreement in the sales order or the sales contract shall prevail.

4. Information Reliability

The relevant data in this document are obtained from batch test by Geehy Laboratory or cooperative third-party testing organization. However, clerical errors in correction or errors caused by differences in testing environment may occur inevitably. Therefore, users should understand that Geehy does not bear any responsibility for such errors that may occur in this document. The relevant data in this document are only used to guide users as performance parameter reference and do not constitute Geehy's guarantee for any product performance.

Users shall select appropriate Geehy products according to their own needs, and effectively verify and test the applicability of Geehy products to confirm that Geehy products meet their own needs, corresponding standards, safety or other reliability requirements. If losses are caused to users due to user's failure to fully verify and test Geehy products, Geehy will not bear any responsibility.

5. Legality

USERS SHALL ABIDE BY ALL APPLICABLE LOCAL LAWS AND REGULATIONS WHEN USING THIS DOCUMENT AND THE MATCHING GEEHY PRODUCTS. USERS SHALL UNDERSTAND THAT THE PRODUCTS MAY BE RESTRICTED BY THE EXPORT, RE-EXPORT OR OTHER LAWS OF THE COUNTRIES OF THE PRODUCTS SUPPLIERS, GEEHY, GEEHY DISTRIBUTORS AND USERS. USERS (ON BEHALF OR ITSELF, SUBSIDIARIES AND AFFILIATED ENTERPRISES) SHALL AGREE AND PROMISE TO ABIDE BY ALL APPLICABLE LAWS AND REGULATIONS ON THE EXPORT AND RE-EXPORT OF GEEHY PRODUCTS AND/OR TECHNOLOGIES AND DIRECT PRODUCTS.

6. Disclaimer of Warranty

THIS DOCUMENT IS PROVIDED BY GEEHY "AS IS" AND THERE IS NO WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

GEEHY'S PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED FOR USE AS CRITICAL COMPONENTS IN MILITARY, LIFE-SUPPORT, POLLUTION CONTROL, OR HAZARDOUS SUBSTANCES MANAGEMENT SYSTEMS, NOR WHERE FAILURE COULD RESULT IN INJURY, DEATH, PROPERTY OR ENVIRONMENTAL DAMAGE.

IF THE PRODUCT IS NOT LABELED AS "AUTOMOTIVE GRADE," IT SHOULD NOT BE CONSIDERED SUITABLE FOR AUTOMOTIVE APPLICATIONS. GEEHY ASSUMES NO LIABILITY FOR THE USE BEYOND ITS SPECIFICATIONS OR GUIDELINES.

THE USER SHOULD ENSURE THAT THE APPLICATION OF THE PRODUCTS COMPLIES

WITH ALL RELEVANT STANDARDS, INCLUDING BUT NOT LIMITED TO SAFETY, INFORMATION SECURITY, AND ENVIRONMENTAL REQUIREMENTS. THE USER ASSUMES FULL RESPONSIBILITY FOR THE SELECTION AND USE OF GEEHY PRODUCTS. GEEHY WILL BEAR NO RESPONSIBILITY FOR ANY DISPUTES ARISING FROM THE SUBSEQUENT DESIGN OR USE BY USERS.

7. Limitation of Liability

IN NO EVENT, UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL GEEHY OR ANY OTHER PARTY WHO PROVIDES THE DOCUMENT AND PRODUCTS "AS IS", BE LIABLE FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, DIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE DOCUMENT AND PRODUCTS (INCLUDING BUT NOT LIMITED TO LOSSES OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY USERS OR THIRD PARTIES). THIS COVERS POTENTIAL DAMAGES TO PERSONAL SAFETY, PROPERTY, OR THE ENVIRONMENT, FOR WHICH GEEHY WILL NOT BE RESPONSIBLE.

8. Scope of Application

The information in this document replaces the information provided in all previous versions of the document.

© 2025 Geehy Semiconductor Co., Ltd. - All Rights Reserved